

## Klimatyzatory kasetonowe INVERTER




**Mistral®**

**R410A**



**ISO9001 CE**

### FUNKCJE

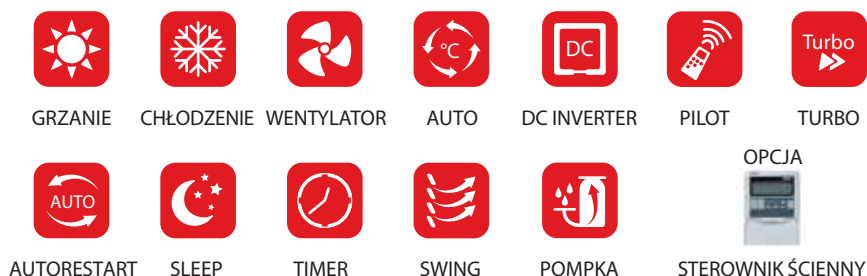

### AKCESORIA



MODEL	JEDN. WEW.		DCD-12HRFN1	DCD-18HRFN1	DCD-24HRFN1	DCD-36HRFN1
	JEDN. ZEWN.		DOU-12HFN1	DOU-18HFN1	DOU-24HFN1	DOU-36HFN1
Zasilanie			1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50 lub 3/380-415/50
Wydajność	kW	Chłodzenie	3,50	5,30	7,00	10,50
		Grzanie	4,00	7,30	7,70	11,00
Pobór mocy	W	Chłodzenie	1090	1630	2180	3290
		Grzanie	950	1450	2100	3210
Pobór prądu	A	Chłodzenie	4,99	7,46	9,98	15,68
		Grzanie	4,35	6,64	9,61	15,54
Przepływ powietrza	m³/h		560/710/800	900/1050/1250	1000/1200/1580	1500/1800/2020
Poziom hałasu	dB(A)	Jedn. wewn.	47	49	50	52
		Jedn. zewn.	58	60	60	63
Waga netto	kg	Jedn. wewn.	16,0	22,0	24,0	26,5
		Panel	2,5	5,0	5,0	5,0
		Jedn. zewn.	35,0	46,0	59,0	100,0
Waga transportowa	kg	Jedn. wewn.	19,0	25,0	28,0	30,5
		Panel	4,5	8,0	8,0	8,0
		Jedn. zewn.	37,0	50,0	63,0	114,0
Czynnik chłodniczy			R410A	R410A	R410A	R410A
Średnica przewodów chłodniczych	cale	Ciecz	1/4	1/4	3/8	3/8
		Gaz	3/8	1/2	5/8	5/8
Maks. długość instalacji	m		20	30	50	65
Maks. przewyższenie	m		8	20	25	30
Temperatura pracy	°C		-15 do 50	-15 do 50	-15 do 50	-15 do 50
Wymiary netto	mm	Jedn. wewn.	570×570×260	840×840×205	840×840×205	840×840×205
		Panel	647×647×50	950×950×55	950×950×55	950×950×55
		Jedn. zewn.	761×279×593	842×695×324	895×862×313	938×1369×392
Wymiary transportowe	mm	Jedn. wewn.	665×665×290	900×900×225	900×900×225	900×900×225
		Panel	715×715×123	1035×1035×90	1035×1035×90	1035×1035×90
		Jedn. zewn.	887×645×355	965×755×395	1043×915×395	1095×1505×495

SPECYFIKACJA